


CM 20 – Technical Specifications (rev3 13/11/02)

Description:	<ul style="list-style-type: none"> • A compact, low profile, monitor enclosure. • Available as passive, switchable, or active only. • Requires 6th order EQ for optimum bass performance. (Refer to DSP settings.)
Frequency Response:	<ul style="list-style-type: none"> • 45Hz-19kHz
Components:	<ul style="list-style-type: none"> • Bass/mid: 15" cone driver • HF: 2" exit compression driver, coaxially mounted
Power handling:	<ul style="list-style-type: none"> • Bass/mid: 800w • HF: 75w
Sensitivity (1):	<ul style="list-style-type: none"> • Bass/mid: 98dB • HF: 106dB
Directivity:	<ul style="list-style-type: none"> • 60 degrees conical above 1kHz
Construction:	<ul style="list-style-type: none"> • 15mm Birch plywood
Finish:	<ul style="list-style-type: none"> • Water based textured black paint (M-Spec) • Dark grey carpet (R-Spec)
Connections:	<ul style="list-style-type: none"> • 4 x Neutrik NL4 connectors • Passive: 1+/1- Input 2+/2- No connection • Active: 1+/1- Mid/Bass 2+/2- HF
Dimensions:	<ul style="list-style-type: none"> • 476mm (W) x 625mm (H) x 450mm (D)
Packaged Dimensions:	<ul style="list-style-type: none"> • 490mm (W) x 650mm (H) x 465mm(D)
Impedance:	<ul style="list-style-type: none"> • Bass/mid: 8 ohms nominal • HF: 8 ohms nominal
Weight:	<ul style="list-style-type: none"> • 33 Kg
Note: (1) Sensitivity measured at 1 metre with 2.83V, using band limited pink noise.	

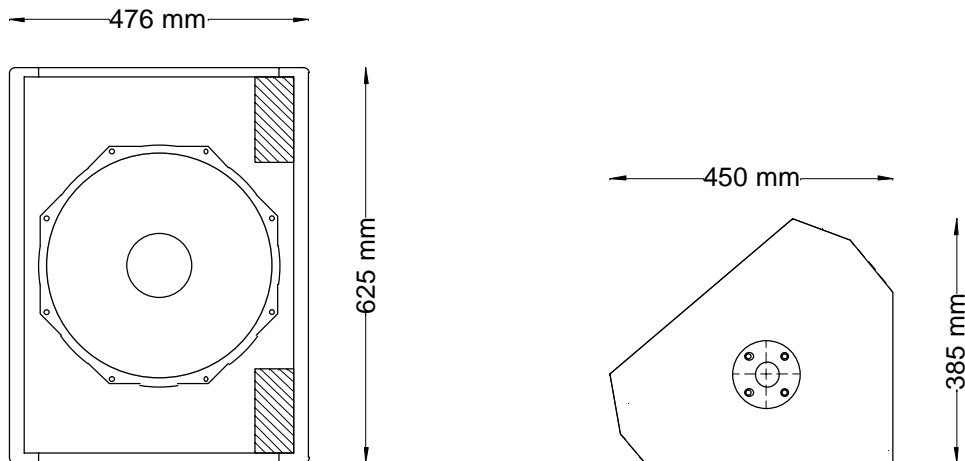

CM 20 Options

Cabinet	Code	Spec.	Handles	Tophat	M20 plate	M20 Blank	Castors	Bracket	Inserts/Fly Points
CM 20P	LS2048	R-Spec	1 off	Yes	No	No	No	No	No
	LS 4048	M-Spec	1 off	Yes	No	No	No	No	12 off M10 inserts
CM 20A/P	LS 2042	R-Spec	1 off	Yes	No	No	No	No	No
	LS 4042	M-Spec	1 off	Yes	No	No	No	No	12 off M10 inserts
CM 20A	LS 2041	R-Spec	1 off	Yes	No	No	No	No	No
	LS 4041	M-Spec	1 off	Yes	No	No	No	No	12 off M10 inserts