


Ethos SB2 Specification Sheet

(Rev: 5 Dated: 30/06/06)

Ethos SB2 is a high power; direct radiating sub bass enclosure, which is designed to be used with the Ethos B2 and Ethos VA vertical array cabinet. The cabinet employs two 18" cone transducers, each mounted in their own-vented back cavity, while both drivers are also co-aligned into a V shaped front manifold. The Ethos SB2 shares the width and depth of the companion Ethos B2, but differs in height. Two Ethos SB2 cabinets when stacked are the same stack height as three Ethos B2 cabinets, enabling a 7Kw. Bass/Sub block to be created with a frontal area of under 2 SQ/M. Offering high power detailed sub bass response in a relatively compact package; the Ethos SB2 is integral element of the Ethos array system, array for the real world.

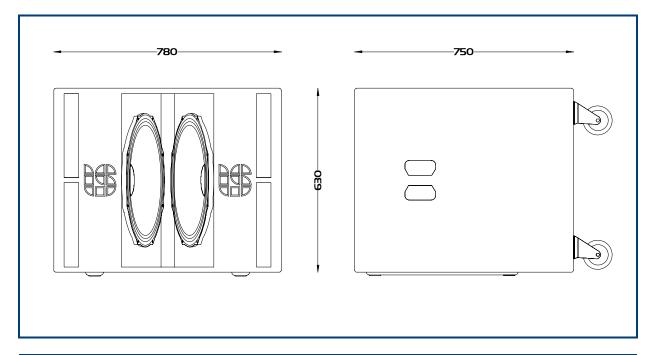

Frequency Response:	• 40Hz –150kHz			
Components:	Bass: 2 off 18" cone drivers			
Power handling:	• 2 X 1000W			
Sensitivity (1):	• 101 dB			
Directivity:	Omni-directional.			
Impedance:	• 2 x 6 Ohm			
Construction:	18mm Birch plywood			
Finish:	Water based textured black paint			
Connections:	 2 x Neutrik NL4 connectors. 1 x EP6 connector. 1+/1- Driver 1 2+/2- driver 2 1) Driver 1+ 2) Driver 2+ 3/4) N/C 5) Driver 1- 6) Driver 2- 			
Dimensions: Packaged Dimensions:	 780mm (W) x 630mm (H) x 750mm (D) 900mm (W) x 740mm (H) x 860mm (D) 			
Weight:	• 78Kg			

Cabinet	Handles	Tophat	M20 plate	Castors	Bracket Pt.	Inserts/Fly Points
Ethos SB2	6 off	No	No	Yes	No	No

Note: (1) Sensitivity measured at 1 metre with 2.83V, using band limited pink noise.