


## IS 26 – Technical Specifications (rev4 17/07/03)

<b>Description:</b>	<ul style="list-style-type: none"> <li>• High power, compact, sub bass cabinet in 4 or 8 ohms</li> <li>• Requires 6<sup>th</sup> order EQ for optimum bass performance. (Refer to DSP settings.)</li> </ul>
<b>Frequency Response:</b>	<ul style="list-style-type: none"> <li>• 40Hz – 150Hz</li> </ul>
<b>Components:</b>	<ul style="list-style-type: none"> <li>• 1 x 15" cone transducer</li> </ul>
<b>Power handling:</b>	<ul style="list-style-type: none"> <li>• 500W</li> </ul>
<b>Sensitivity (1):</b>	<ul style="list-style-type: none"> <li>• 99dB (8 ohm)</li> <li>• 101dB (4 ohm)</li> </ul>
<b>Directivity:</b>	<ul style="list-style-type: none"> <li>• Omni-directional</li> </ul>
<b>Construction:</b>	<ul style="list-style-type: none"> <li>• 18mm Birch plywood</li> </ul>
<b>Finish:</b>	<ul style="list-style-type: none"> <li>• Water based textured black paint</li> </ul>
<b>Connections:</b>	<ul style="list-style-type: none"> <li>• 2 x Neutrik NL4 connectors</li> <li>• 1+/- input 2+/- no connection</li> </ul>
<b>Dimensions:</b>	<ul style="list-style-type: none"> <li>• 885mm (W) x 350mm (H) x 435mm (D)</li> </ul>
<b>Packaged Dimensions:</b>	<ul style="list-style-type: none"> <li>• 910mm (W) x 365mm (H) x 450mm(D)</li> </ul>
<b>Impedance:</b>	<ul style="list-style-type: none"> <li>• 4 or 8 ohms nominal</li> </ul>
<b>Weight:</b>	<ul style="list-style-type: none"> <li>• 32kg</li> </ul>
<b>Note:</b> (1) Sensitivity measured at 1 metre with 2.83V, using band limited pink noise.	

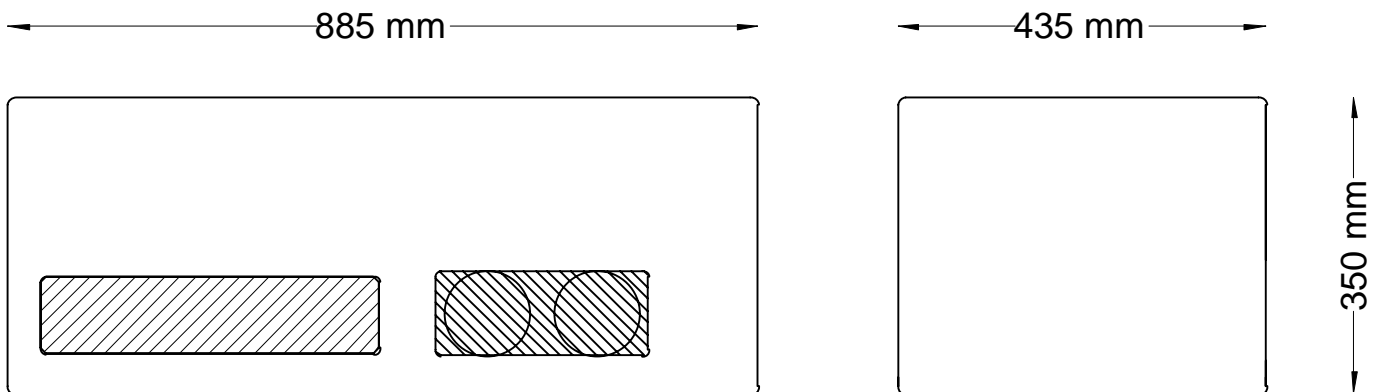

## IS 26 Options

Cabinet	Code	Spec.	Handles	Top hat	M20 plate	M20 Blank	Castors	Bracket	Inserts/Fly Points
IS 26/4	LS 4057	M-Spec	No	No	No	No	No	No	No
IS 26/8	LS 4056	M-Spec	No	No	No	No	No	No	No