




The B1 is a compact high power bass cabinet. It utilises a 15" bass cone loaded into a vented back cavity, while the front of the driver is loaded into a manifold that helps to improve performance between 80-150Hz. The B1 is designed to be used in the landscape mode and will only give optimum performance when used in this mode. The B1 was designed to be used as an integrated system with the ML12 or ML14 enclosures, but also has applications as a compact bin for installation. Its low profile enables it to be located under seating or furniture.

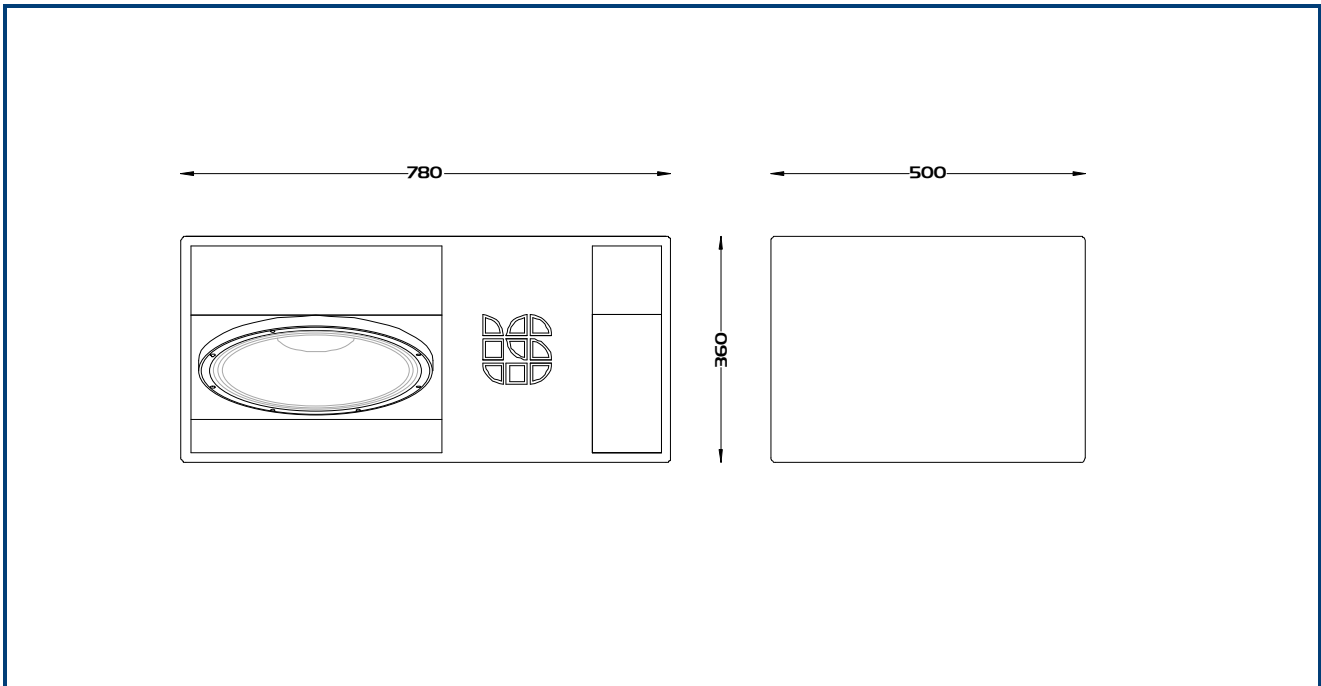

Frequency Response:	<ul style="list-style-type: none"> • 45Hz – 150Hz
Components:	<ul style="list-style-type: none"> • Bass: 15" cone driver • HF: N/A
Power handling:	<ul style="list-style-type: none"> • 500w
Sensitivity (1):	<ul style="list-style-type: none"> • 99dB
Directivity:	<ul style="list-style-type: none"> • Omni-directional
Impedance:	<ul style="list-style-type: none"> • 4 Ohm (8 Ohm version available.)
Construction:	<ul style="list-style-type: none"> • 15mm Birch plywood
Finish:	<ul style="list-style-type: none"> • Water based textured black paint
Connections:	<ul style="list-style-type: none"> • 2 x Neutrik NL4 connectors • 1+/1- Input 2+/2- linked.
Dimensions:	<ul style="list-style-type: none"> • 780mm (W) x 360mm (H) x 500mm (D)
Packaged Dimensions:	<ul style="list-style-type: none"> • 490mm (W) x 930mm (H) x 630mm (D)
Weight:	<ul style="list-style-type: none"> • 35.8Kg

Cabinet	Handles	Tophat	M20	Castors	Bracket Pt.	Inserts/Fly Points
B1	2 off	No	Yes	No	N/A	N/A

Note: (1) Sensitivity measured at 1 metre with 2.83V, using band limited pink noise.